

Life Smart
Simply Brilliant

BLEND Curtain Controller

Setting up your LifeSmart BLEND Curtain Controller
User Guide Version 1.0

PRODUCT INTRODUCTION

The LifeSmart BLEND Curtain Controller opens and closes the curtains as well as stops the curtains moving by easily pressing the physical key switches, or rather, simply controlling it with LifeSmart App anytime, anywhere. It can work with other smart devices to initiate triggers such as pairing with environmental sensor to adjust the curtain automatically, according to time or indoor brightness.

It can also participate in different customized scenes such as schedule to open/close curtains, or realize the automation of curtains the way you want it when Curtain Controller is connected with LifeSmart Motion Sensors, Cube Door/Window Sensor and other smart devices.

SPECIFICATIONS


MEASUREMENTS	86*86*33MM
WEIGHT	140g
COLOR	Ivory
POWER CONSUMPTION （STATIC）	<1.5W
RATIO RANGE	800m (Open Field)
OPERATING HUMIDITY	5~95%
OPERATING TEMPERATURE	-5~45℃
OPERATING FREQUENCY	433MHz GFSK
OPERATING VOLTAGE	220V AC
MAXIMUM LOAD	1000W

LIFESMART SMART CURTAIN CONTROLLER WIRE OPERATIONS

零火线路指示 (DIAGRAM)

窗帘电机 (CURTAIN MACHINERY)

零火线路指示

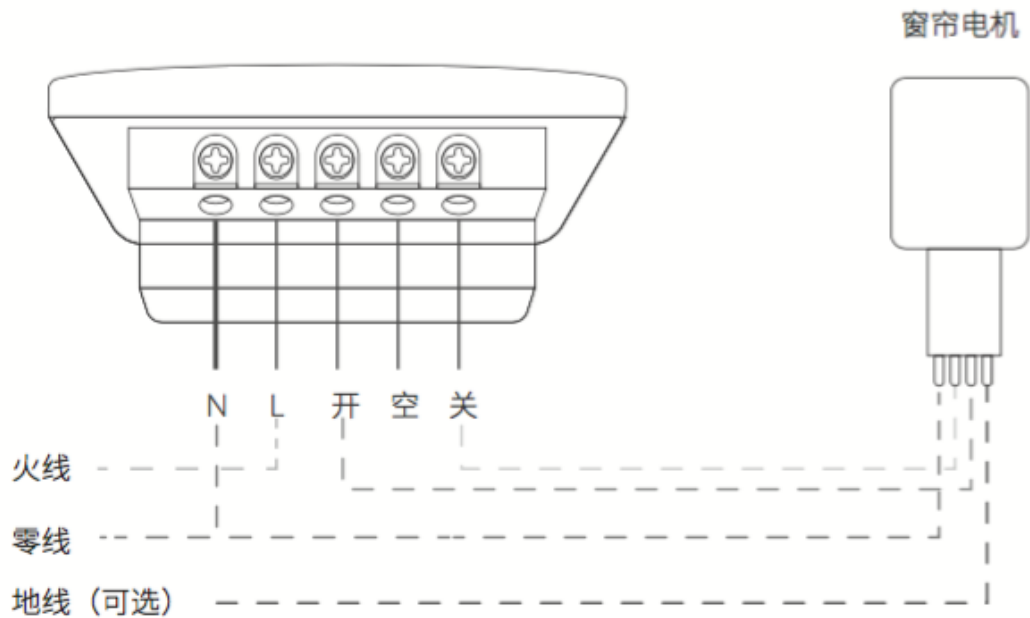

N L Open Empty Close

火线 (Live Wire)


零线 (Neutral Wire)

地线 (Earth Wire) 可选 (Optional)

As this installation is involved with strong current, please require a professional electrician to install this device for you. Please install wires in strict accordance with the wiring layout on the back of the power box. Or we won't be responsible for the damage of the product.

LIFESMART BLEND CURTAIN CONTROLLER

- 开 : Open
- 停 : Pause
- 关: Close

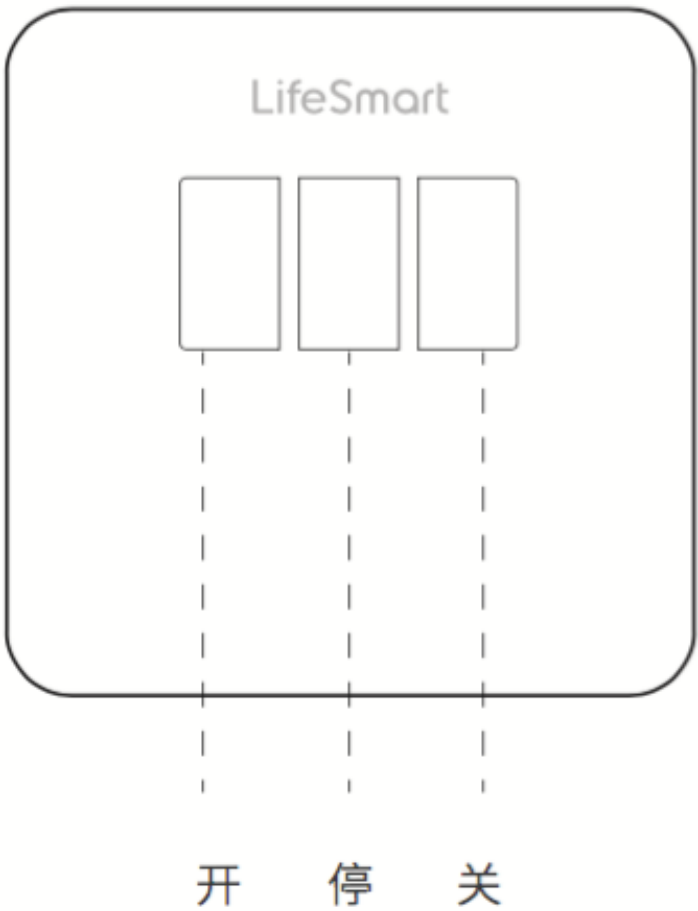

Key on the panel indicates:

- Left Key: Open Curtain
- Middle Key: Pause
- Right Key: Close Curtain

PRODUCT INSTALLATION

1. Cut off the power leading to the BLENDCurtain Controller and make sure that the wiring is not charged.;
2. Grasp the back of the controller firmly. Apply pressure to the back edge of controller face near the bottom to separate the front panel from the back;
3. Install wires in strict accordance with the wiring diagram shown above, and then screw them firmly;
4. For safety reasons, it is strongly recommended to use insulating tape on screws to ensure that bare wiring does not make contact with other wires or metal. Especially when fixing the the controller machinery in the metal box, pleas make sure the screws not in direct contact with the metal box!
5. Neatly arrange the wires in metal box, place the controller and then mount it with screws firmly;
6. Replace the controller cover and ensure that it is attached correctly to enable contact with the right slots;
7. You may restore power to the controller and verify normal operation by checking whether the indication light on the controller panel flickers and lights. If not, please recheck your wiring. If there is bad connection or no respond when command please cut off power and restore power again.

PAIRING OPERATION

LifeSmart BLEND Curtain Controller requires Smart Station. Please download LifeSmart App and configure a Smart Station first.

1. After configuration of Smart Station, click "Add", and then click "Add New Device". Choose "Curtain Controller" to enter pairing session;
2. Make sure the Curtain Controller is on, then press and hold the button on the left for no less than 5 seconds until there is a white light flashing from the inside of the controller, and then click "Start Pairing";
3. The Curtain Controller will be in position for pairing automatically. When it's completed, click "Confirm" at the top right corner to finish pairing. You can also rename your Curtain Controller here and then click "Confirm";
4. If an over time error occurs, please repeat step 1 to 3 until it's paired successfully;
5. LifeSmart BLEND Curtain Controller is equipped with many more features when connected with other smart devices. Please follow the tips instructed by LifeSmart App or refer to www.ilifsmart.com to learn more.

WARRANTY DESCRIPTION

Thank you for purchasing this LifeSmart product. In order to protect your right, please read the following content carefully: The warranty period of our company's products is one year from the date of purchase or longer if local laws impose a longer minimum term, in which case the minimum term is the warranty period. During the warranty period, any faults caused by the product itself for quality problems that arise under normal usage, LifeSmart will provide a free replacement.

IN YOUR PACKAGE

Curtain Controller	1	User's Guide	1
Screws	2		

Please contact our customer service team before you send over for replacement through 400-886-1911

ATTENTION

The following conditions are not covered by the warranty:

Product failure or damage caused by installation, use, and maintenance that is not in accordance with the product instructions;

Products beyond the warranty period;

Products that have the barcode tampered with or removed;

Devices that have been tampered with or customised outside of LifeSmart Terms of Service as on the LifeSmart APP and website;

User-Caused damage. such as inappropriate voltage input, high temperature, accidental spillage, physical damage, etc;

Product failure or damage caused by force majeure such as earthquakes, fires or floods;

Product failure or damage caused by other problems except the product itself.

TECH SUPPORT

Email:

support@ilifsmart.com

Telephone:

400-886-1911

QQ:

4008861911

Website:

www.ilifsmart.com

DECLARATION

LifeSmart is a trademark of Hangzhou LifeSmart Technology Co., Ltd. As for the trademarks, product logos and product names from other companies presented within this manual, they are possessed by their own right holders. Without our written permission, no entity or individual shall extract, copy or disseminate in part or the whole of the manual contents in any form. Due to product version upgrades or other reasons, content of this manual may change. Our company reserves the right to change the contents of this manual without any notice. This manual is used only for instructional purposes. We strive to provide accurate information in this manual, but we are not able to ensure that the content of this manual is current. Statements, information and advice in this manual do not constitute any expressed or implied assurance. Updated manuals are available on our website at www.ilifsmart.com or by contacting our Happiness Team.

Copyright © 2017 Hangzhou LifeSmart Technology Co., Ltd. All rights reserved.